




T-Guidewire

Teflon-coated

Description

The T MSB Guidewire is an essential tool in peripheral procedures, allowing lesion crossing, catheter navigation and other interventional devices with precise direction.

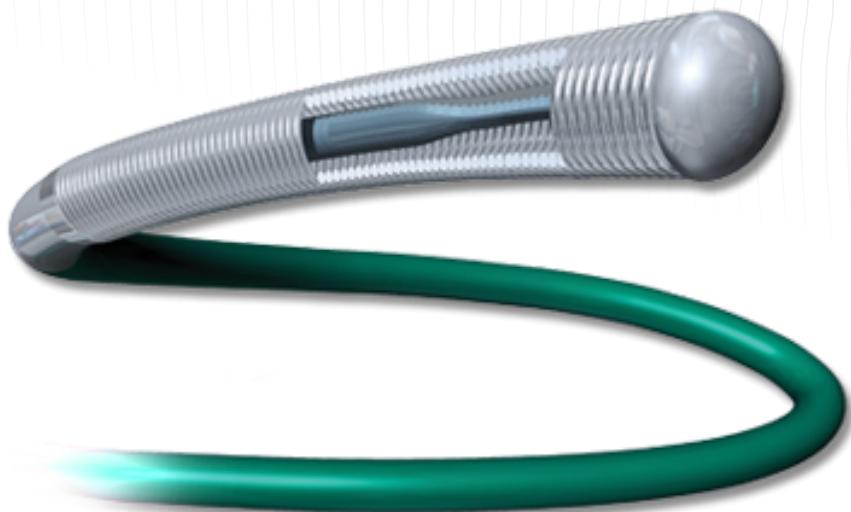

Specifications

- Diameter: 0.035"
- Length: 150 cm, 180 cm, and 260 cm
- Tip Types: Angled and J
- Stiffness: Standard, Stiff, and Super Stiff
- Coating: Teflon or Hydrophilic

References

Code	Coating	Measurement
51200	Teflon Coated	0.035" X 150CM J3MM
51202	Super Stiff Teflon Coated	0.035" X 260CM J3MM
51205	Teflon Coated	0.032" X 260CM J3MM
51381	Rigid Hydrophilic Angled	0.035" X 150CM
51382	Rigid Hydrophilic Angled	0.035" X 260CM
51394	Standard Hydrophilic Angled	0.035" X 150CM
51395	Standard Hydrophilic Angled	0.035" X 180CM
51396	Standard Hydrophilic Angled	0.035" X 260CM
51397	Stiff Hydrophilic Angled	0.035" X 180CM



+55 71 3024 4015
www.msbboxbrasil.com

Araponga Street, 364, Block 01, Lot 19,
Pitangueiras Lauro de Freitas - Bahia - Brazil
- 42701 330

msb@msbboxbrasil.com

msb-medical-system-do-brasil



WARNING: Product mentioned in this material is intended for use by a physician. Before use, it is important to read the package insert thoroughly for the instructions for use, warnings, and possible complications associated with the use of this device.

Always check the regulatory status of the device in your region. It must not be reproduced, distributed, or extracted. Illustrations are artistic representations only and should not be considered as engineering drawings or photographs.